


3710

121' WORKING HEIGHT





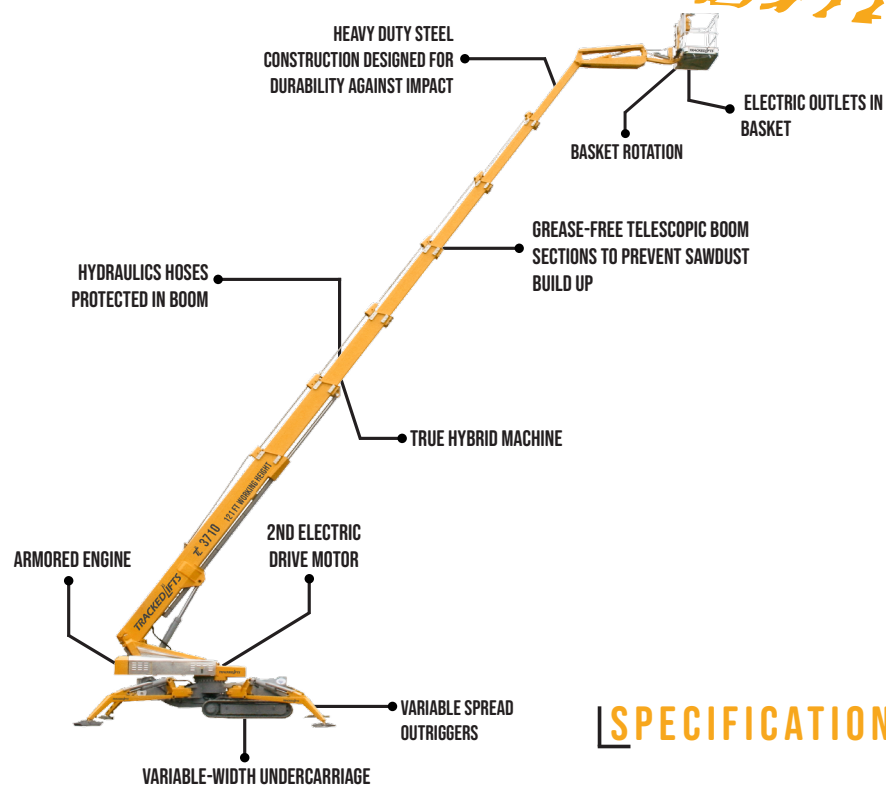


SPECIFICATIONS

Max. working height	121'4"
Max. outreach	44'9"
Max. basket load	550 lbs
Basket size	3'2" x 2'10" (1-man basket)
Basket rotation	± 41°
Turret rotation	355° non-continuous
Traveling length	24'6" (26'7" with basket)
Traveling height	6'6"
Traveling width	3'8" narrow mode / 4'11" wide mode
Outrigger Spread	15'8" x 15'8" wide position / 9'8" x 19'5" narrow position
Battery	24V / 400Ah / 5h
Charger	24V / 25A
Diesel Engine	Kubota Diesel, 18.8 HP
Total weight	12,566 lbs
Gradability, max. across slope	35% (19.3°)
Gradability, max. up and down slope	35% (19.3°)
Deployment ability on slopes up to	30% (16.7°)

DIAGRAMS

DATA AND DIMENSIONS ARE INDICATIVE AND NOT BINDING

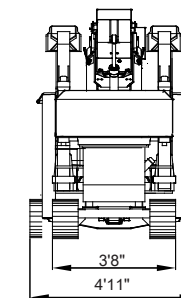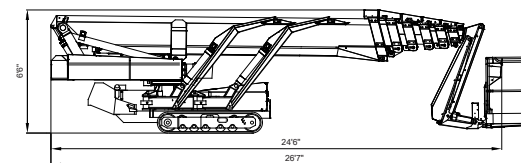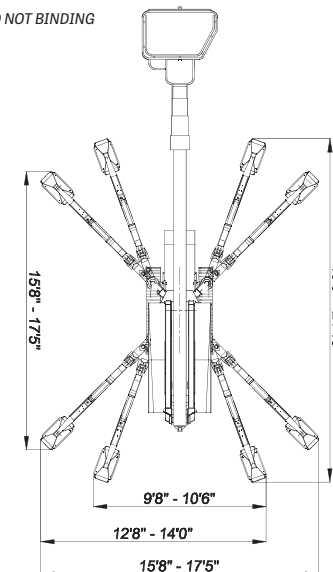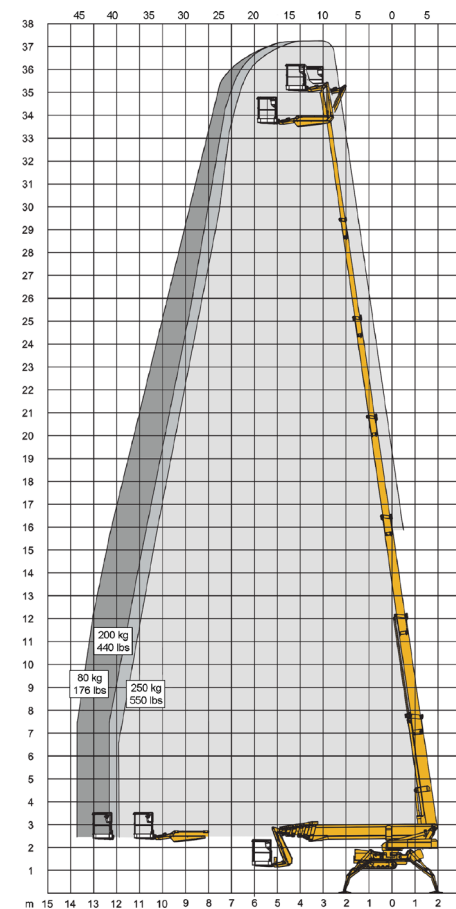

ADD-ON OPTIONS:

- White Rubber Non-Marking Tracks
- Custom Colors
- Spotlight in Basket
- Flashing Beacon Lights on Boom Stabilizers (5)
- Radio Remote Control Drive
- Auto Leveling
- Intercom
- Battery only (400Ah) version